



65" HIGH BRIGHTNESS 4,000 NIT LCD MODEL DS652LR5

The DS652LR5 is a 65-inch high bright professional LCD with IPS technology. With a maximum brightness rating of 4,000 nits, this display features a local dimming LED back light technique for incredible, high contrast picture quality and low power consumption.

Screen image simulated.

Key Features

- 4,000 nit Maximum Brightness
- IPS Panel
- Blackening defect-free up to 110°C
- Low power consumption
- LED Backlit with Local Dimming
- 1920 x1080 Full HD Native Resolution
- 1,000,000:1 Dynamic Contrast Ratio
- Built-in Video Daisy Chaining

65" HIGH BRIGHTNESS 4,000 NIT LCD

MODEL DS652LR5

PANEL

LCD Panel Type	64.53 inches IPS LCD
Native Resolution	1920 x 1080
Backlight	Direct LED
Brightness	4000 nits
Default Color Temperature	D65 (6500 K)
Contrast Ratio	3,000:1 (static) 1,000,000:1 (dyn)
Color Depth	10 bit
Response Time	10 ms (typ)
Viewing Angle	178° / 178°
Light Life Time	50,000 hrs (typ.)
Blackening Defect Free	Up to 110°C (230°F)
Panel Surface	AG Haze 1%, 3H

POWER

Power Supply	Internal
Rated Voltage	100 V ~ 240 V, 50 Hz / 60 Hz
Power On Mode	510 W (typ), 740 W (max)
Power Saving Mode	< 1 W
AC Out	< 100 W

MECHANICAL SPECS

Bezel Width (T/B/L/R)	18 / 18 / 11.9 / 11.9 mm
Cabinet Color	Black
Monitor Dimension (LxHxD, w/o stand)	1457 x 844 x 102 mm
Monitor Weight (set/package)	52.5 kg / 56.5 kg
VESA Mounting (dimension)	400 x 400 mm, 600 x 400 mm
Orientation	Portrait / Landscape

USER INTERFACE

Language	English
Daisy Chain	DVI, RS-485
Proof of Image Retention	Yes
Dimming Control (DCR)	Yes
Built-in Video Wall Support	Up to 15x15
ID Setting for Daisy Chain	Yes
On/Off Scheduling	Yes
Ambient Light Sensor	Yes
Total Turn-on time	Yes
Internal Temperature Sensor	Yes
Network Control	RS-232 (In/Out), RJ45
OSD Menu Rotation	Yes
Carrying Handles	Yes
Remote Monitoring	SNMP

I/O PORTS

DVI-D	In (x1), Out (x1)
DisplayPort	In (x1)
RS-232	In (x1), Out (x1)
RJ-45	In (x1)
Audio	In (x1), Out (x1)

ACCESSORIES




Included Accessories	Power Cord, DVI cable, RJ45 cable, RS232 cable, Remote controller, Batteries, Manual CD, QSG
Optional Accessories	AD Box, Extension Sensor Kit

ENVIRONMENT

Operating Temperature	0° C ~ 45° C
Storage Temperature	-20° C ~ 60° C
Humidity	10% ~ 80% RH Non-condensing

CERTIFICATION

CE / FCC / ROHS	
-----------------	--

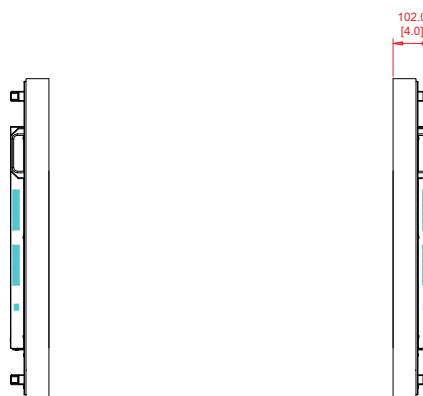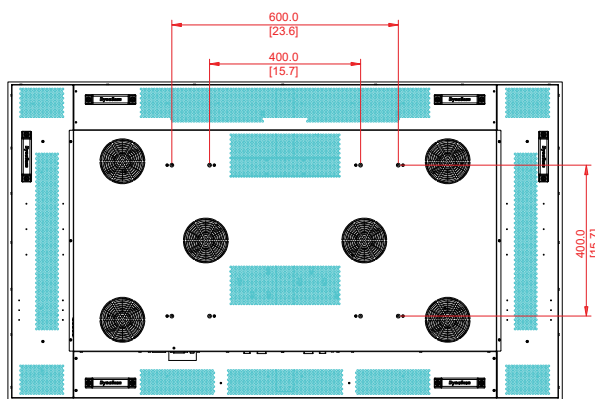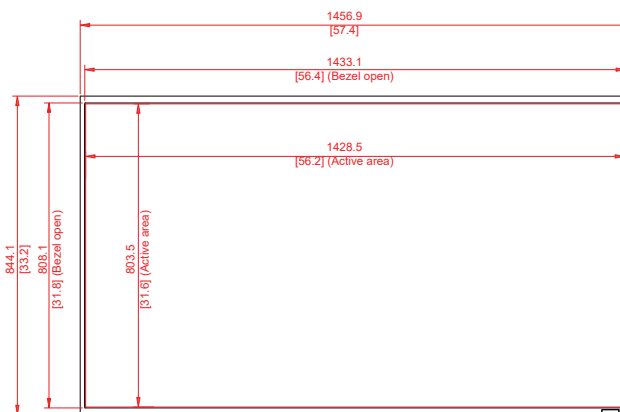

For More Information, Contact DynaScan:

Tel: +1 949-421-0348, +1 866-508-4848

Email: info@dynascandisplay.com

Online: www.dynascandisplay.com